

Green Lighting 
Low Carbon Living

LED@WORK

Quality makes us different



LED AT WORK PTE LTD.

61, Kaki Bukit Ave 1, #02-04 Shun Li Industrial Park, Singapore 417943.

TEL : (65) 6748 1033

FAX: (65) 6846 6088

E-mail: ledatworkpteltd@gmail.com

Website: www.ledatwork.com.sg


**PROFESSIONAL
LIGHTING TECHNOLOGY**

2020-2021




reddot winner 2021
lighting design


Connectors




1292-RT-CON-L
1292 BUILT-IN TRACK
CONNECTOR L TYPE FOR CEILING




1292-RT-CON-F
1292 BUILT-IN TRACK CONCAVE
CONNECTOR L TYPE




1292-RT-CON-M
1292 BUILT-IN TRACK
CONVEX CONNECTOR L TYPE




1292-RT-CON-X
1292 BUILT-IN TRACK
CONNECTOR CROSS TYPE




1292-RT-CON-T
1292 BUILT-IN TRACK
CONNECTOR T TYPE




1292-ST-CON-L
1292 SURFACE MOUNTED TRACK
CONNECTOR L TYPE



1292-ST-CON-F
1292 SURFACE MOUNTED TRACK
CONCAVE CONNECTOR L TYPE



1292-ST-CON-M
1292 SURFACE MOUNTED TRACK
CONVEX CONNECTOR L TYPE



1292-ST-CON-T
1292 SURFACE MOUNTED TRACK
CONNECTOR T TYPE




1292-ARC-250
QUADRANT OF R250mm(RADIUS)
ARC TRACK CONNECTOR




1292-ARC-400
QUADRANT OF R400mm(RADIUS)
ARC TRACK CONNECTOR



1292-ARC-550
QUADRANT OF R550mm(RADIUS)
ARC TRACK CONNECTOR

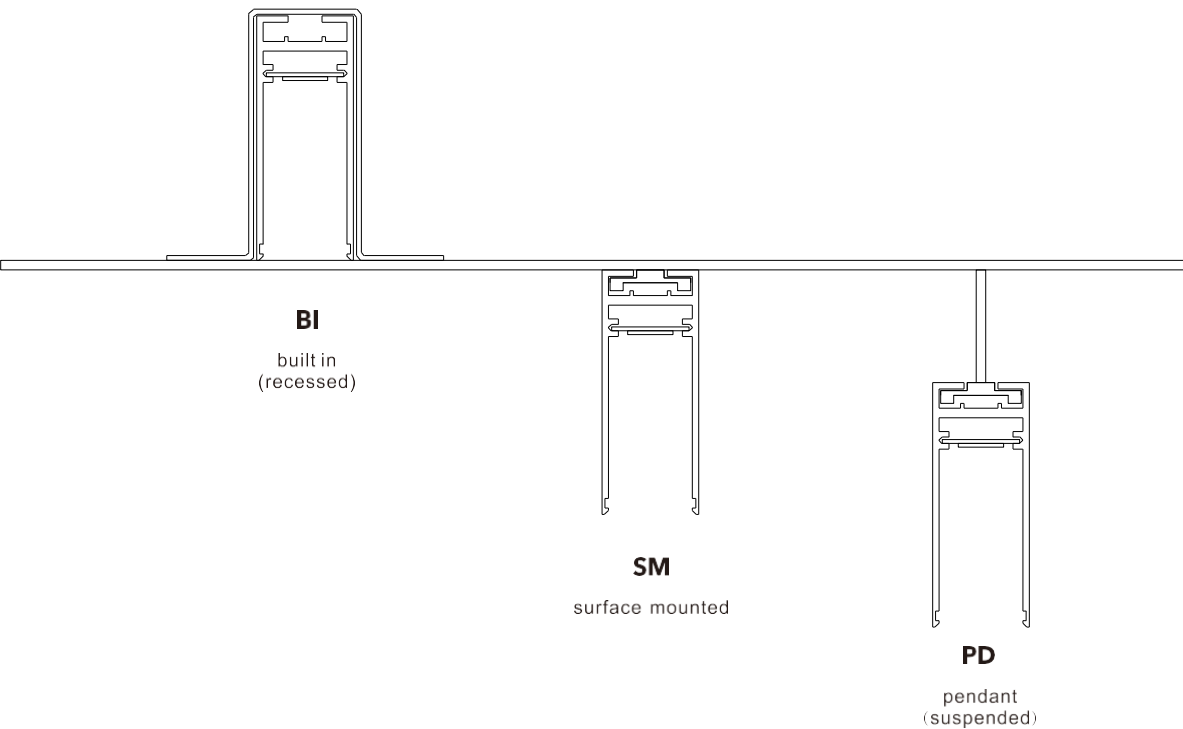

POP Thickness

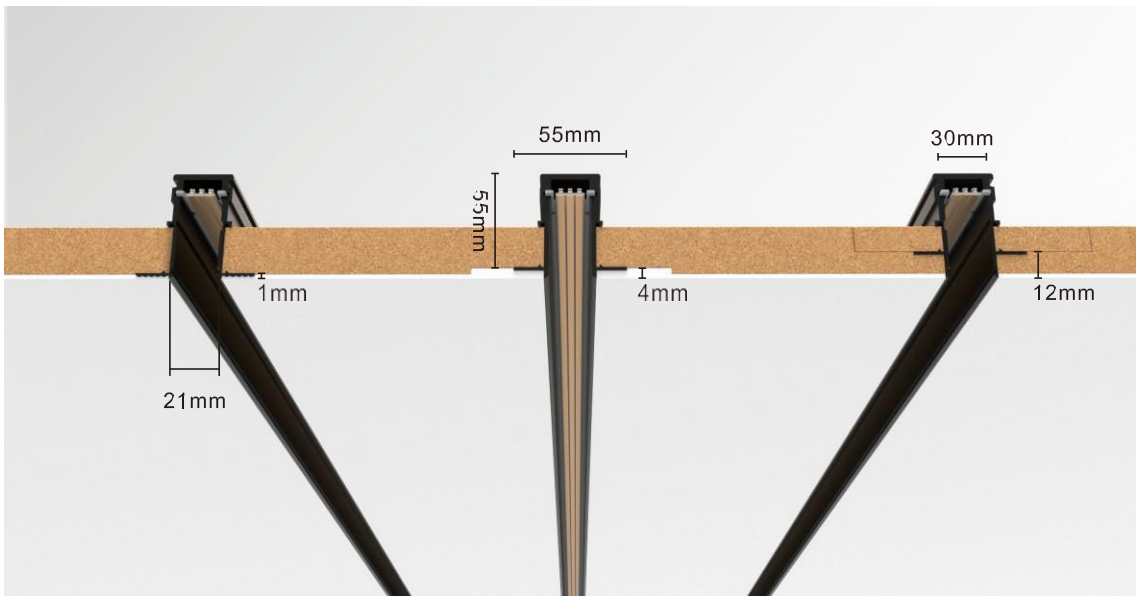


TECHNICAL PARAMETERS

Model No.	Size(mm)	Cut-out(mm)	Color	Type	POP Thickness
1292-RT-CON-L	109x109x55mm	109x109x35mm	Black/White	Built-in / Recessed	1mm/4mm/12mm
1292-RT-CON-F	123x123x55mm	123x123x35mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-RT-CON-M	98x98x55mm	98x98x35mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-RT-CON-X	160x160x55mm	160x160x35mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-RT-CON-T	160x115x55mm	160x115x35mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-ST-CON-L	98.5x98.5x63mm	/	Black/White	Surface Mounted	/
1292-ST-CON-F	123x123x29.5mm	/	Black/White	Surface Mounted	/
1292-ST-CON-M	114x114x29.5mm	/	Black/White	Surface Mounted	/
1292-ST-CON-T	155x115x63mm	/	Black/White	Surface Mounted	/
1292-ARC-250	R250mm x 1/4	/	Black/White	Built-in/Recessed	1mm
1292-ARC-400	R400mm x 1/4	/	Black/White	Built-in/Recessed	1mm
1292-ARC-550	R550mm x 1/4	/	Black/White	Built-in/Recessed	1mm

TECHNICAL PARAMETERS

Model No.	Size(mm)	Cut-out(mm)	Color	Type	POP Thickness
1292-RT-S	55x55x1013mm	35x1015mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-RT-M	55x55x1508mm	35x1510mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-RT-L	55x55x2008mm	35x2010mm	Black/White	Buit-in/Recessed	1mm/4mm/12mm
1292-ST-S	63x30x1009mm	/	Black/White	Surface Mounted	/
1292-ST-M	63x30x1504mm	/	Black/White	Surface Mounted	/
1292-ST-L	63x30x2004mm	/	Black/White	Surface Mounted	/
1292-PT-S	63x30x1009mm	/	Black/White	Suspended	/
1292-PT-M	63x30x1504mm	/	Black/White	Suspended	/
1214-PT-L	63x30x2004mm	/	Black/White	Suspended	/





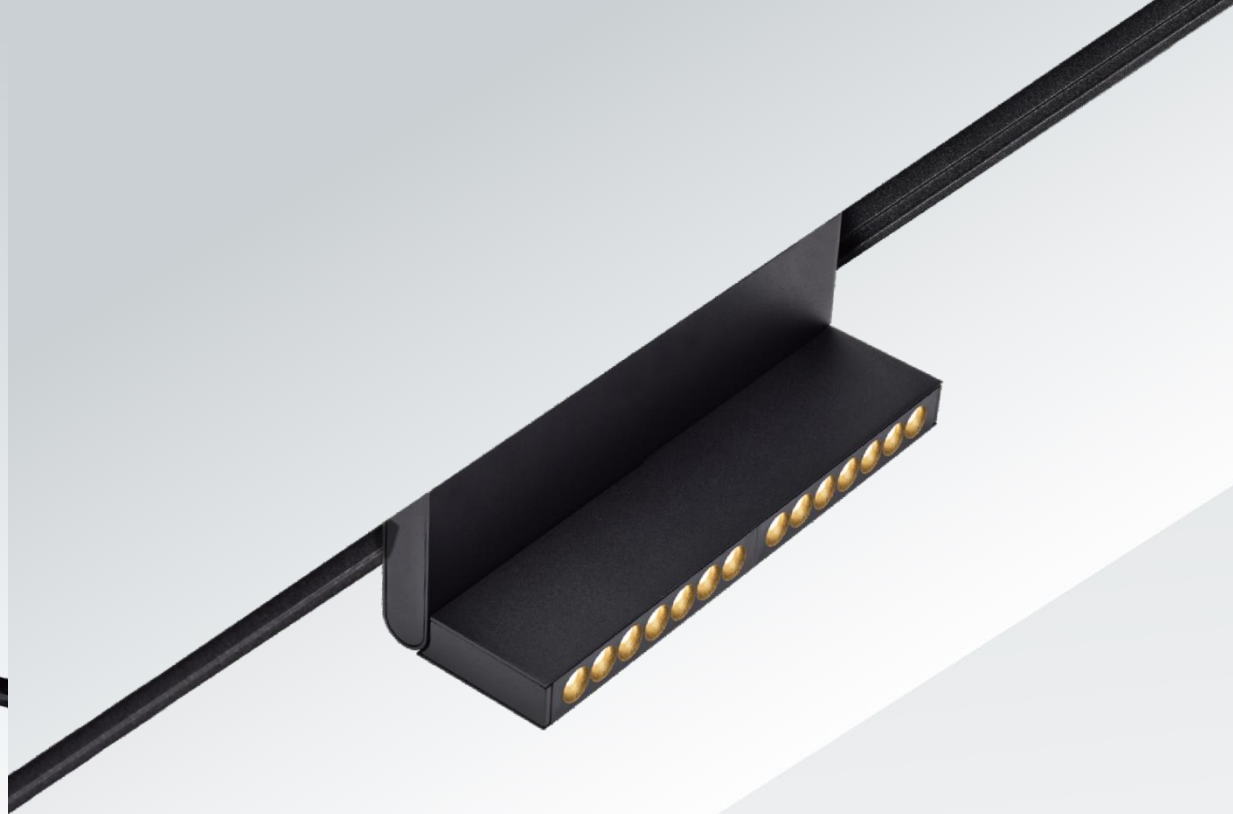

1292B01 WITH LED DIFFUSER


FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Foldable structure, you can change the beam angle within one minute and adjust it from 0~90 degree.
- ⊙ LED diffuser makes the light very even and soft (optional).
- ⊙ LED lens makes the light more focused (optional led lens), suitable for accent lighting.

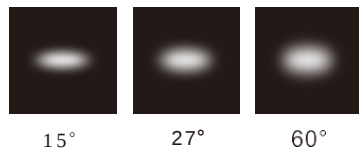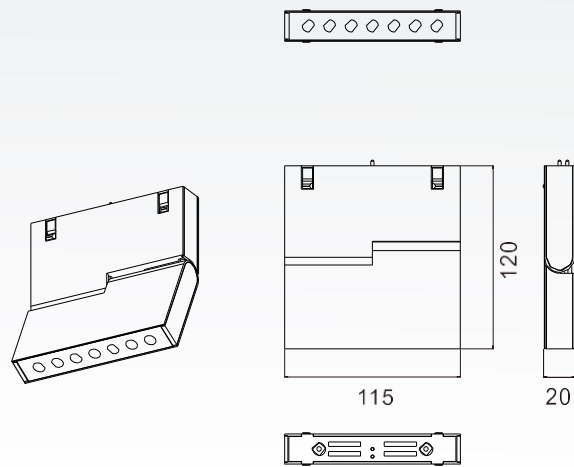

TECHNICAL PARAMETERS




Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1292B01 WITH LED LENS	9W	115*20*120mm	600 lm	350mA	24V
1292B01 WITH LED DIFFUSER	9W	115*20*120mm	400 lm	300mA	24V

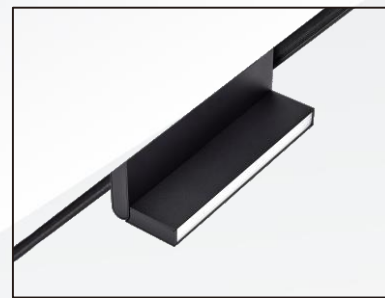

1292B01/2 WITH LED DIFFUSER


FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Foldable structure, you can change the beam angle within one minute and adjust it from 0~90 degree.
- ⊙ LED diffuser makes the light very even and soft (optional).
- ⊙ LED lens makes the light more focused (optional led lens), suitable for accent lighting.

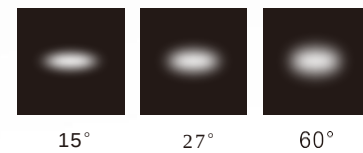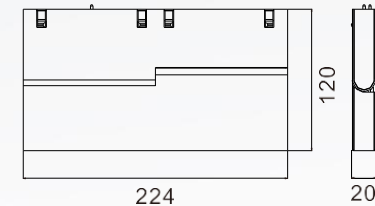

TECHNICAL PARAMETERS


Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1292B01/2 WITH LED LENS	9W*2	224*20*120mm	1200 lm	700mA	24V
1292B01/2 WITH LED DIFFUSER	9W*2	224*20*120mm	800 lm	600mA	24V

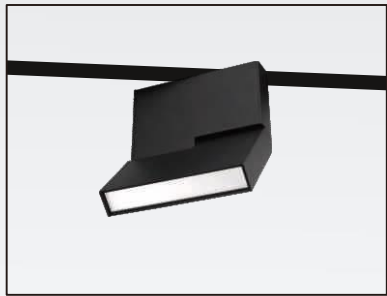

1214B02
WITH LED DIFFUSER

FEATURES


- ⦿ Low voltage 24V circuit design and external driver makes it be very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Foldable structure, you can change the beam angle within one minute and adjust it from 0~90 degree.
- ⦿ Turning connector part makes the light be 355 degree rotatable.
- ⦿ LED diffuser makes the light be very even and soft (optional).
- ⦿ LED lens makes the light be more focused (optional led lens), suitable for accent lighting.

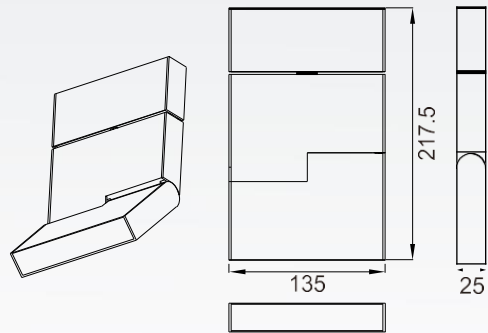

TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1214B02 WITH LED LENS	9W	217.5*135*25mm	600 lm	350mA	24V
1214B02 WITH LED DIFFUSER	9W	217.5*135*25mm	400 lm	300mA	24V


Optic Lens

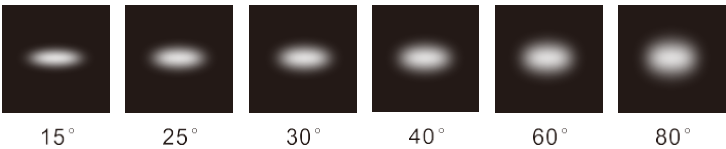

1214B02/2
WITH LED DIFFUSER

FEATURES


- ⦿ Low voltage 24V circuit design and external driver makes it be very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Foldable structure, you can change the beam angle within one minute and adjust it from 0~90 degree.
- ⦿ Turning connector part makes the light be 355 degree rotatable.
- ⦿ LED diffuser makes the light be very even and soft (optional).
- ⦿ LED lens makes the light be more focused (optional led lens), suitable for accent lighting.

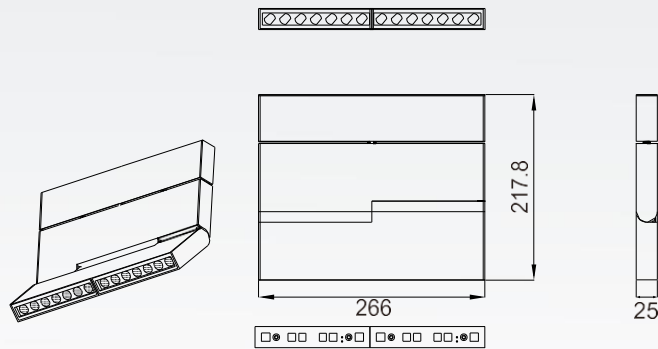

TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1214B02/2 WITH LED LENS	9W*2	266*217.8*25mm	1200 lm	700mA	24V
1214B02/2 WITH LED DIFFUSER	9W*2	266*217.8*25mm	800 lm	600mA	24V

Optic Lens


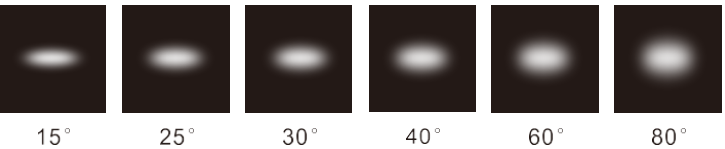




1292B03 WITH LED DIFFUSER


FEATURES

- ⦿ Low voltage 24V circuit design and external driver makes it very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Built-in type makes the light integrated with the track and ceiling perfectly.
- ⦿ LED diffuser makes the light very even and soft (optional).
- ⦿ LED lens makes the light more focused (optional led lens), suitable for accent lighting.

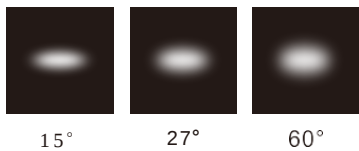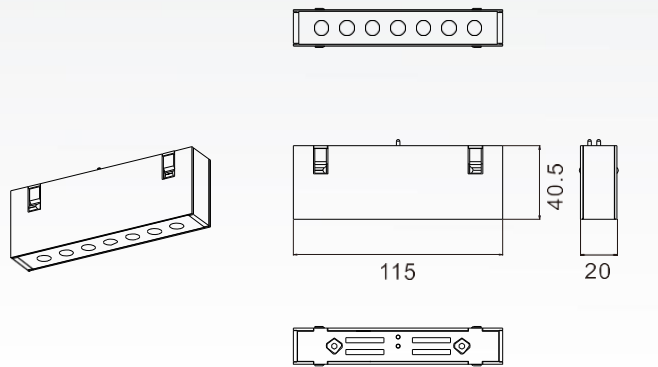

TECHNICAL PARAMETERS



Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1292B03 WITH LED LENS	9W	115*20*40.5mm	600 lm	350mA	24V
1292B03 WITH LED DIFFUSER	9W	115*20*40.5mm	400 lm	300mA	24V

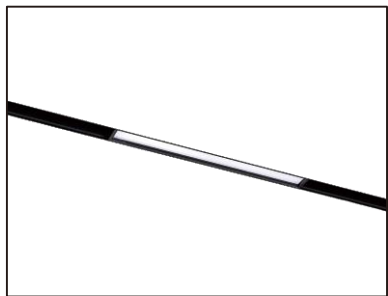

1292B03/2 WITH LED DIFFUSER



FEATURES

- ⦿ Low voltage 24V circuit design and external driver makes it very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Built-in type makes the light integrated with the track and ceiling perfectly.
- ⦿ LED diffuser makes the light very even and soft (optional).
- ⦿ LED lens makes the light more focused (optional led lens), suitable for accent lighting.

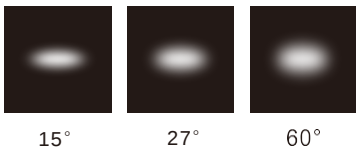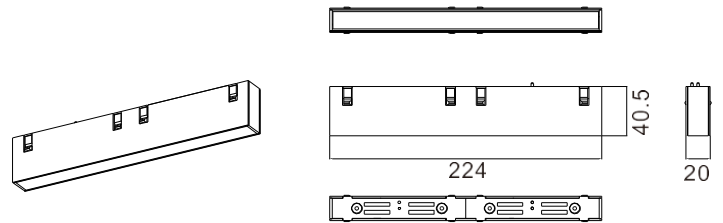

TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1292B03/2 WITH LED LENS	9W*2	224*40.5*20mm	1200 lm	700mA	24V
1292B03/2 WITH LED DIFFUSER	9W*2	224*40.5*20mm	800 lm	600mA	24V

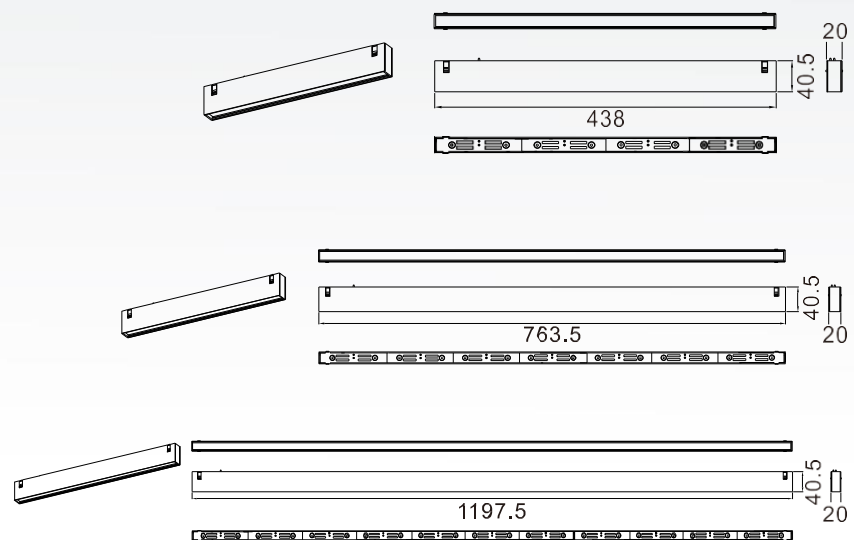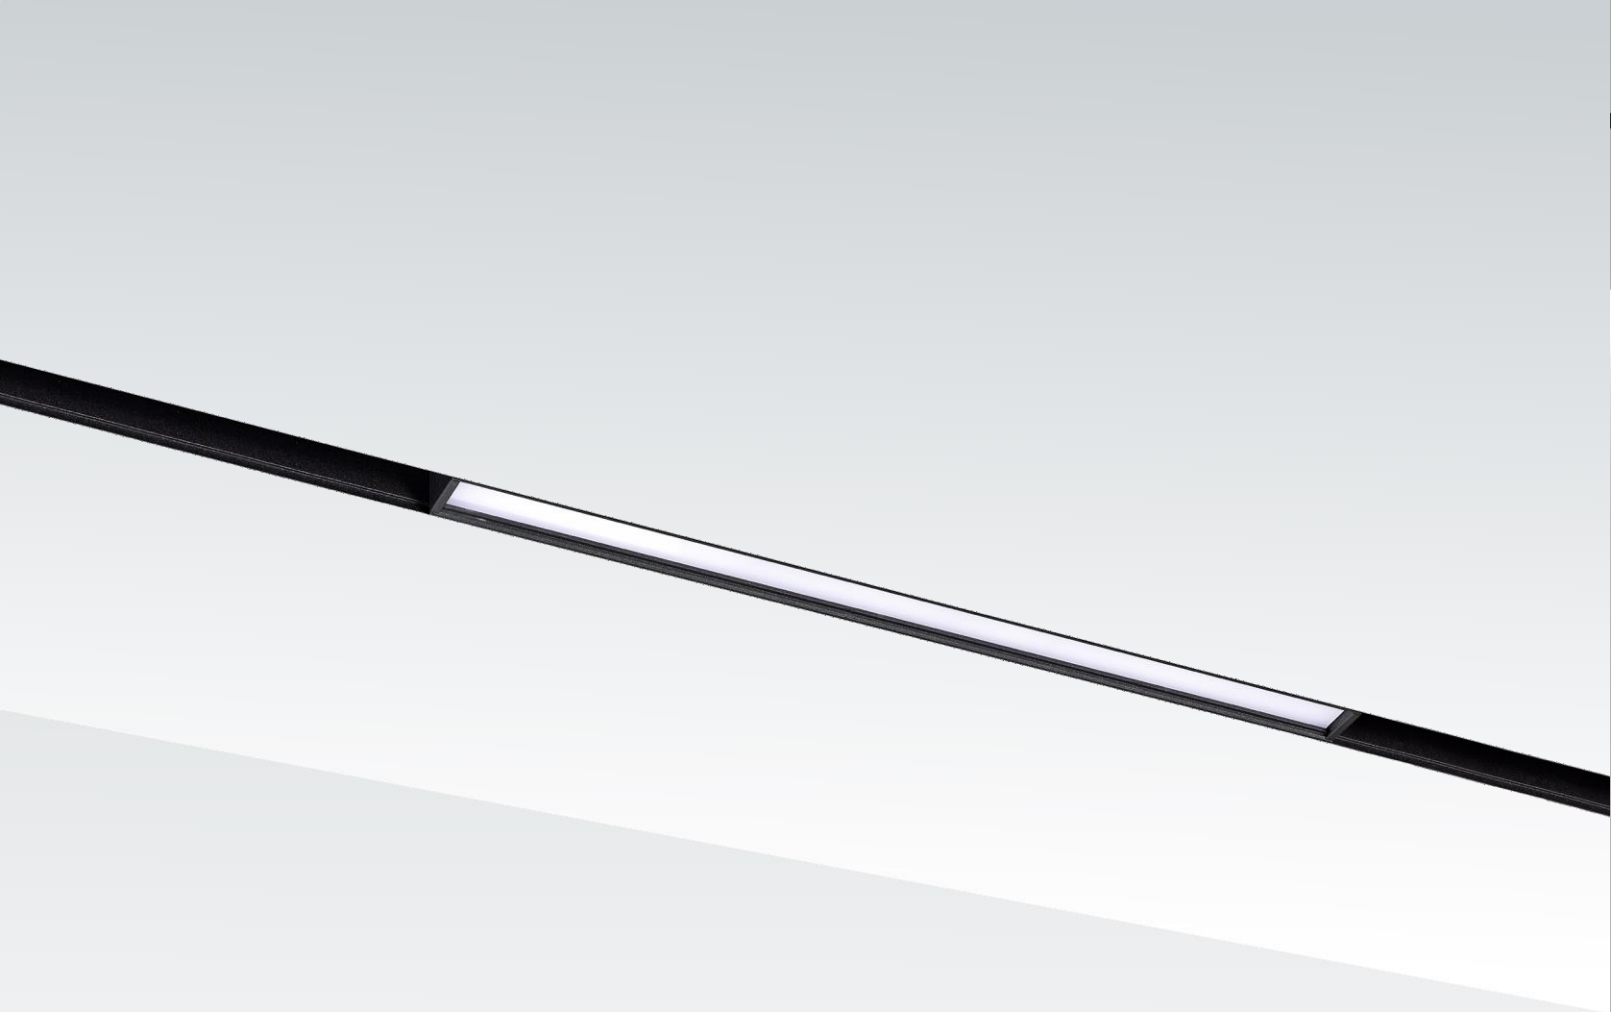

FEATURES



- ◎ Low voltage 24V circuit design and external driver makes it very safe.
- ◎ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ◎ Built-in type makes the light integrated with the track and ceiling perfectly.
- ◎ LED diffuser makes the light very even and soft (optional).



TECHNICAL PARAMETERS



Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1292B03/40	14W	438*40.5*20mm	700 lm	900mA	24V
1292B03/80	28W	763.5*40.5*20mm	1300 lm	1800mA	24V
1292B03/120	42W	1197.5*40.5*20mm	2100 lm	2700mA	24V



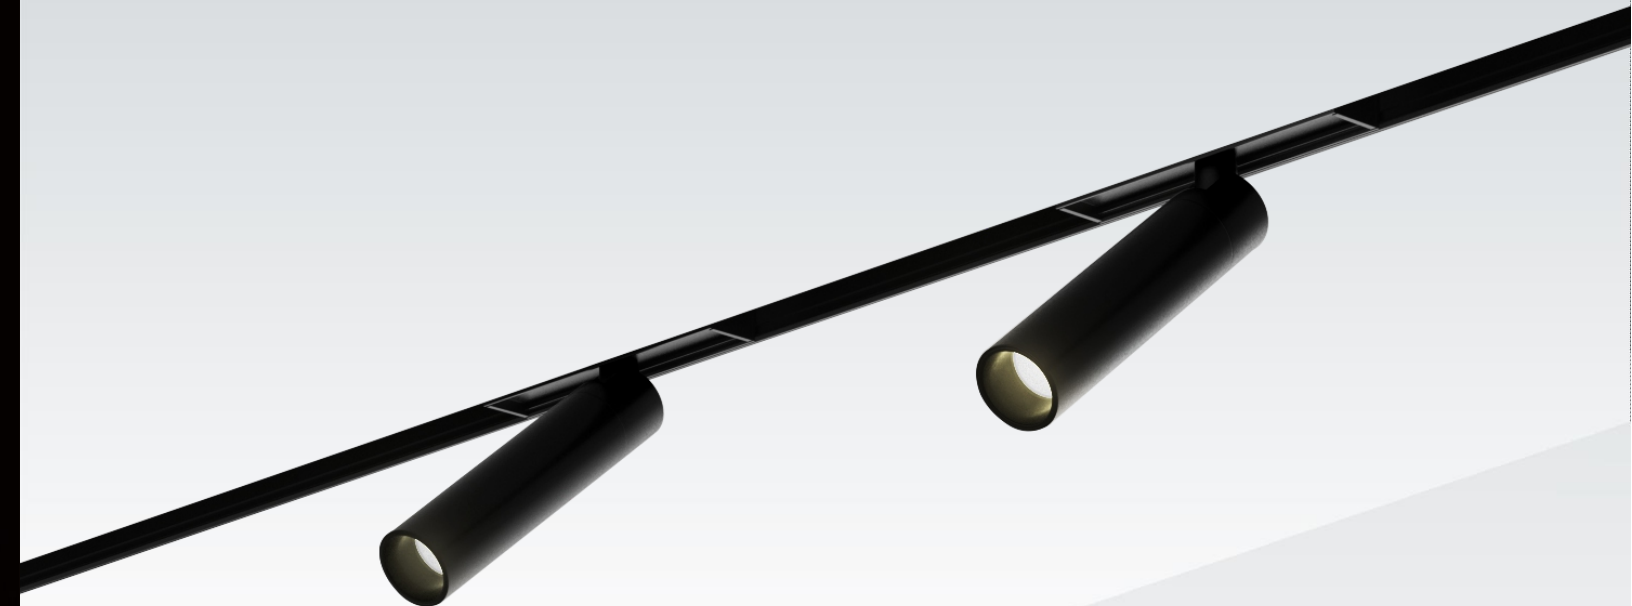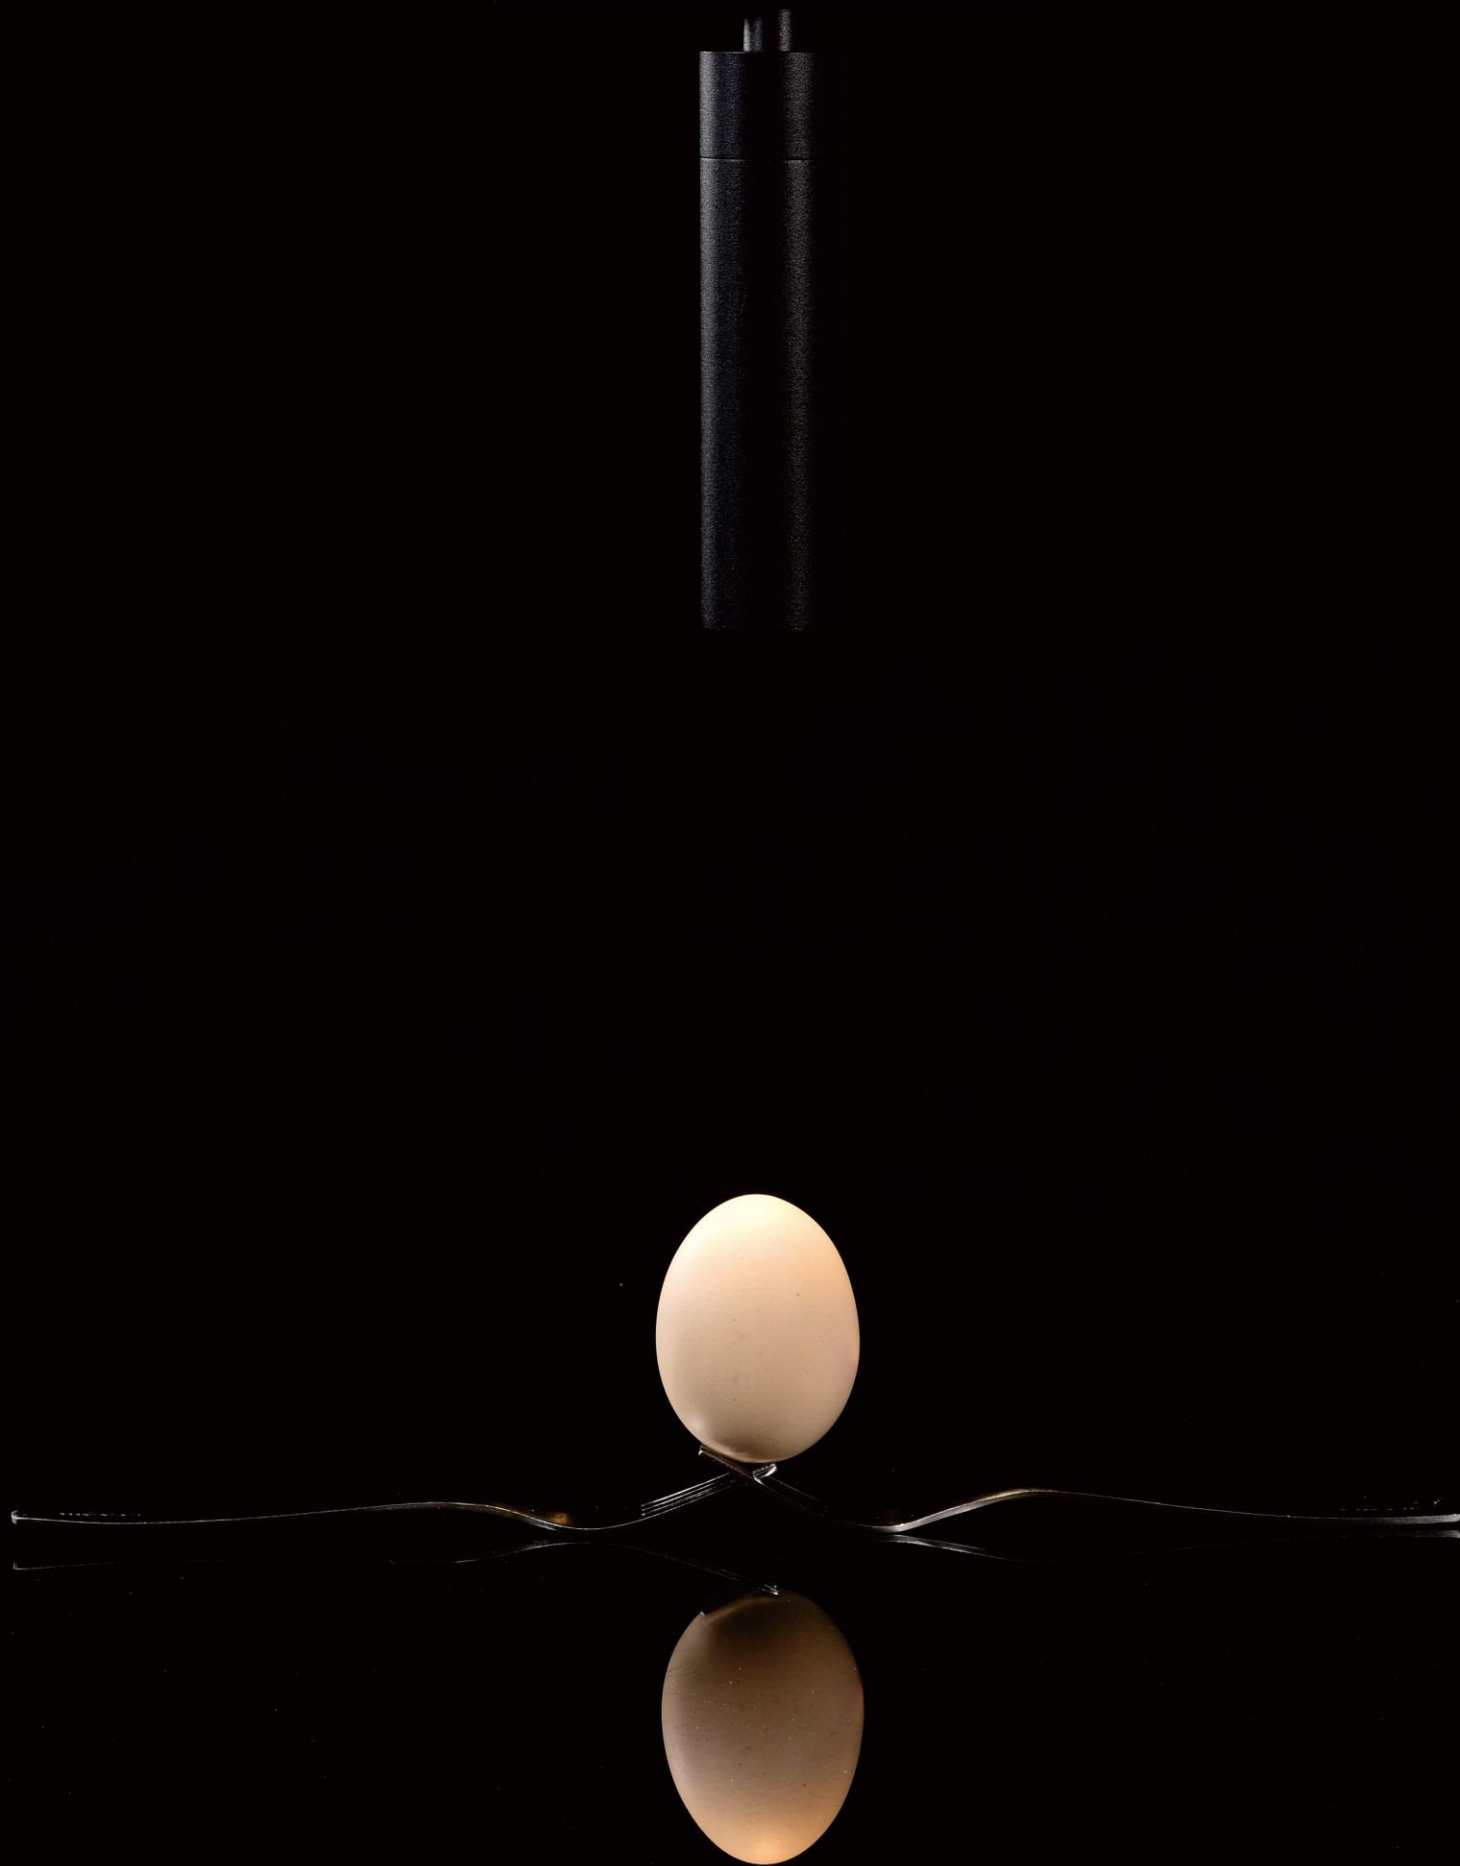





FEATURES

- ⦿ Low voltage 24V circuit design and external driver makes it very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Adjustable and rotatable structure makes the light more flexible and humanized.
- ⦿ LED lens makes the light more focused (optional led lens), suitable for accent lighting.
- ⦿ Fashionable, slim cylindrical design suitable for indoor lighting.
- ⦿ Even distribution of lights gently protect your eyes.

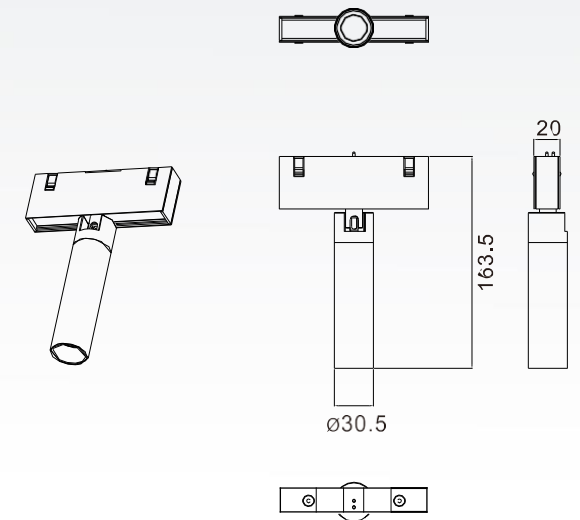

TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1312B01	6W	Ø30.5*163.5*20mm	220lm	600mA	24V

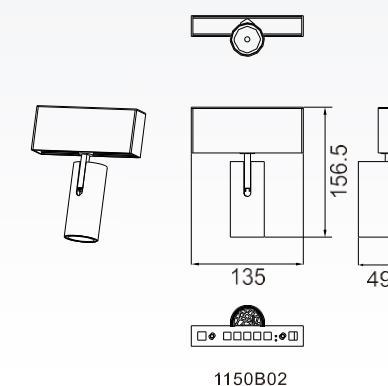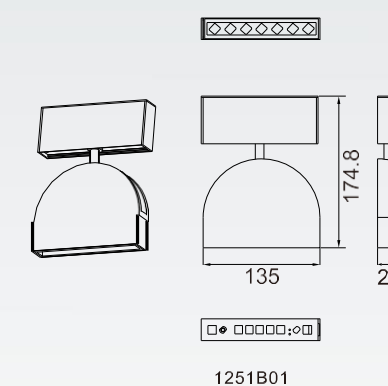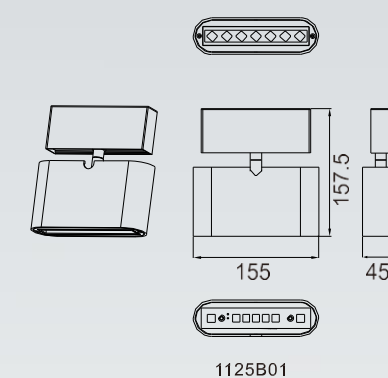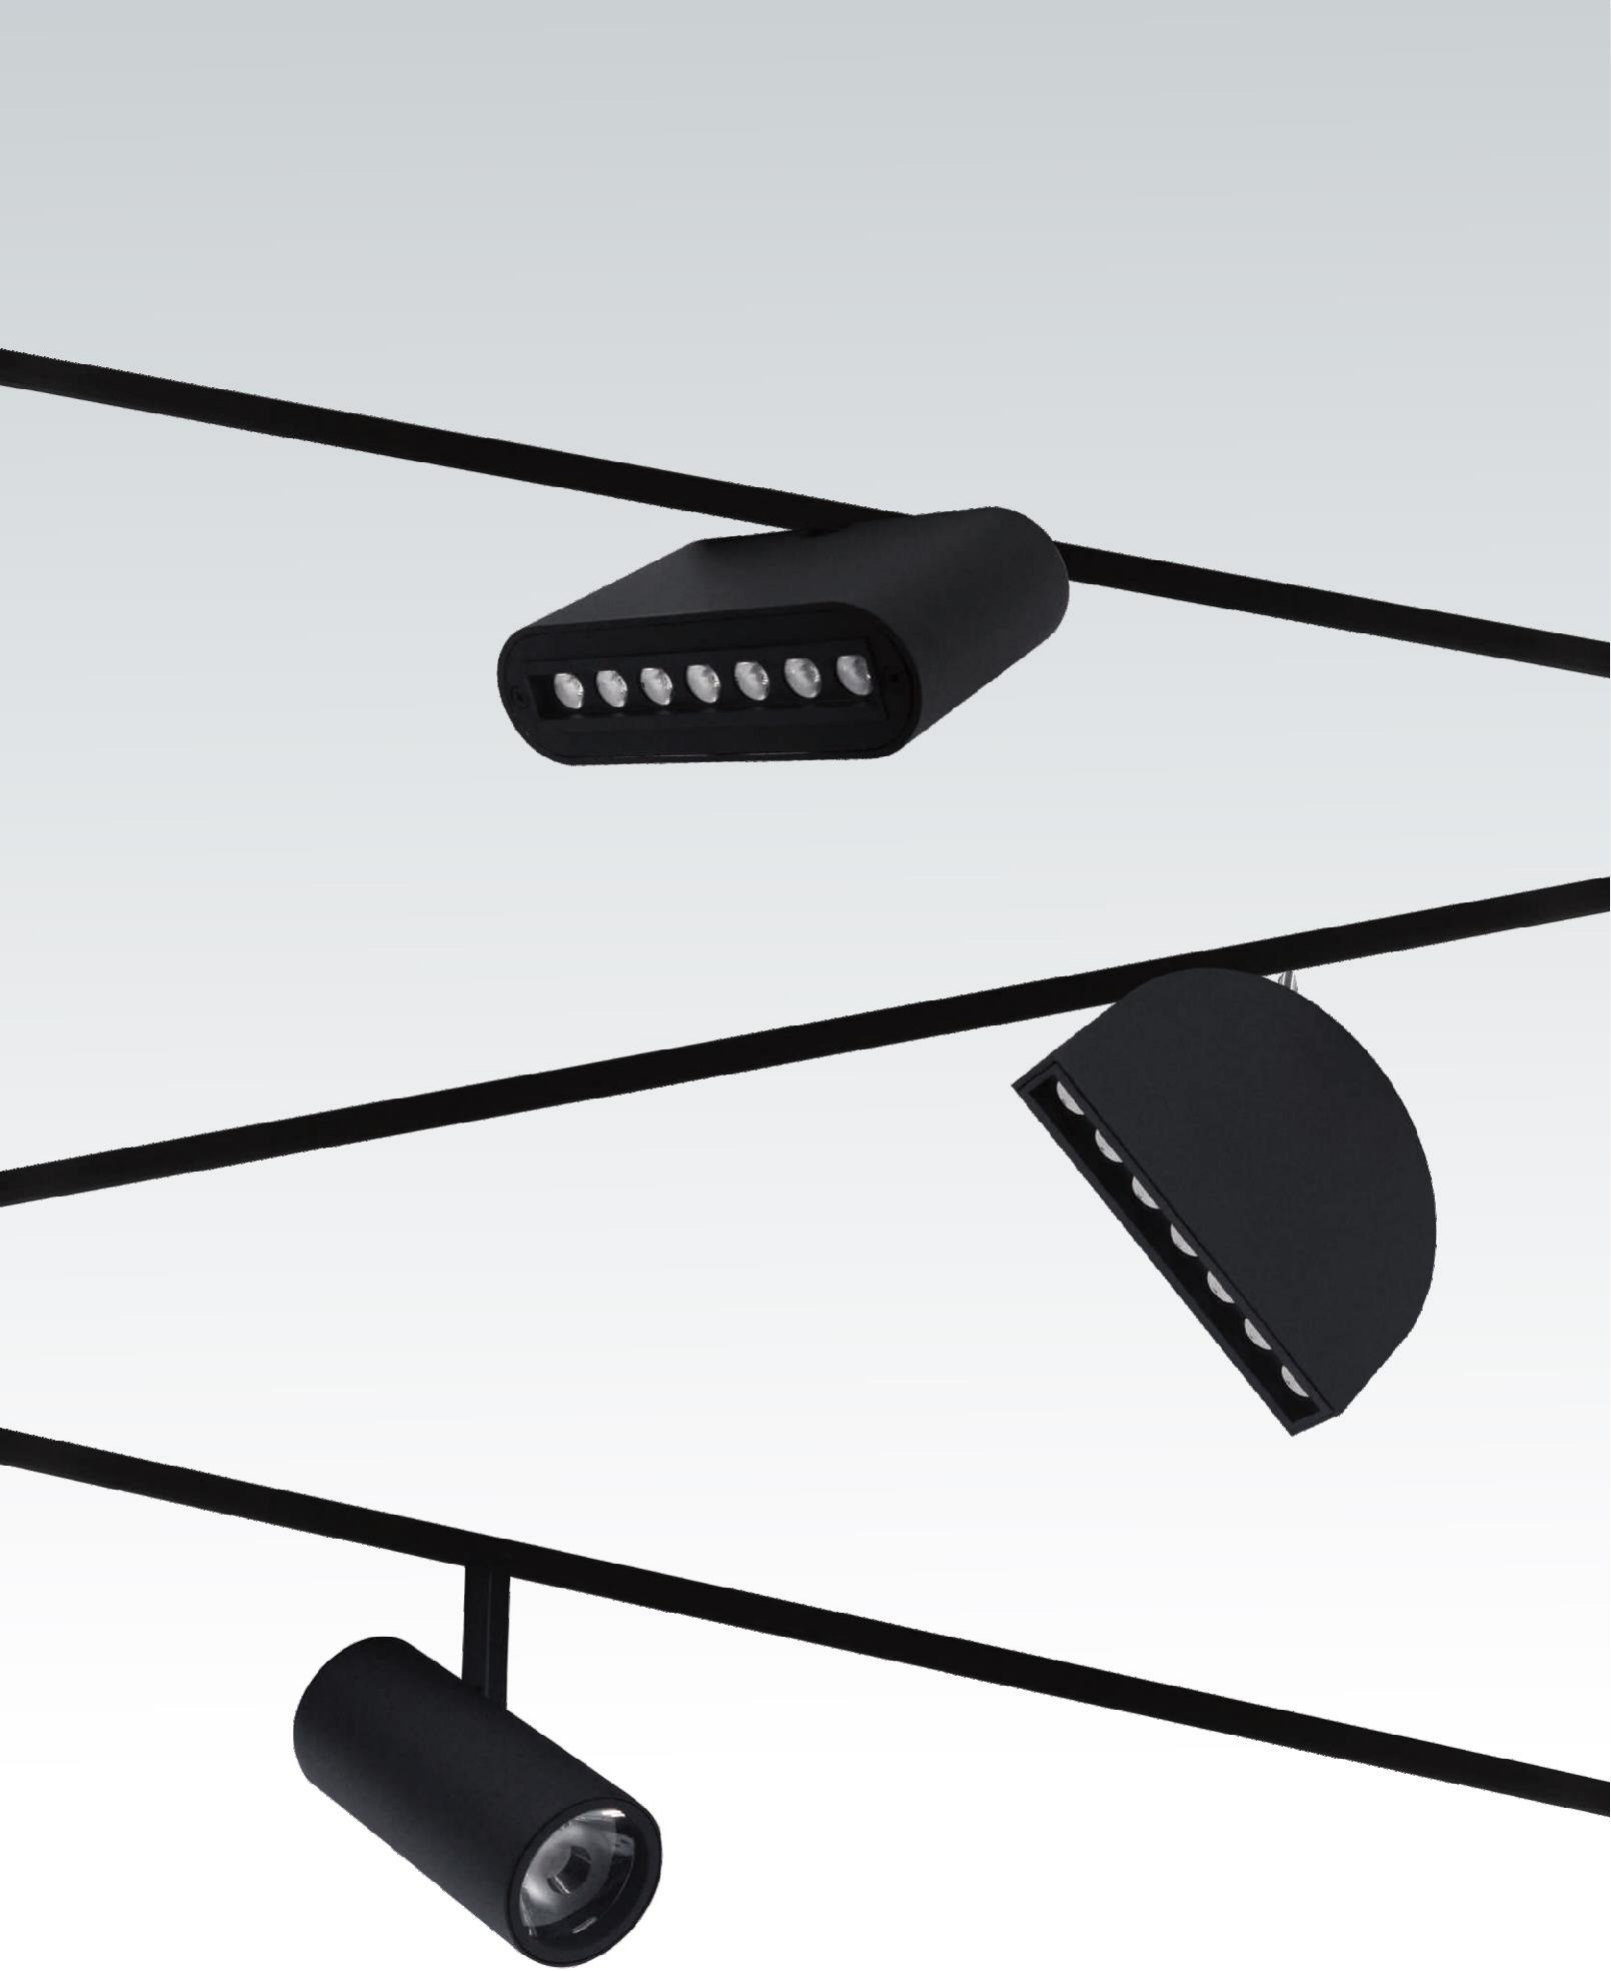

FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it be very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Adjustable and rotatable structure makes the light be more flexible and humanized.
- ⊙ LED lens makes the light be more focused (optional led lens), suitable for accent lighting.
- ⊙ Beautiful, decorative, contemporary oval shaped fixture suitable for decorative installations.
- ⊙ Decorative fixture with moderate illumination.

FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it be very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Adjustable and rotatable structure makes the light be more flexible and humanized.
- ⊙ LED lens makes the light be more focused (optional led lens), suitable for accent lighting.
- ⊙ Beautiful, decorative, contemporary, unique shaped fixture suitable for decorative installations.
- ⊙ Decorative fixture with moderate illumination.

FEATURES


- ⊙ Low voltage 24V circuit design and external driver makes it be very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Adjustable and rotatable structure makes the light be more flexible and humanized.
- ⊙ Extremely narrow beam angle LED lens makes the light be pretty focused for accent lighting.
- ⊙ Exquisite and small size assure it be a very nice spot light.



TECHNICAL PARAMETERS


Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1125B01	9W	155*157.5*45mm	600 lm	350mA	24V
1251B01	9W	135*174.8*25mm	600 lm	350mA	24V
1150B02	4W	135*156.5*49mm	450 lm	350mA	24V

Optic Lens

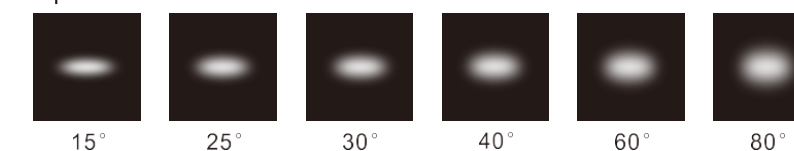





reddot winner 2021
lighting design

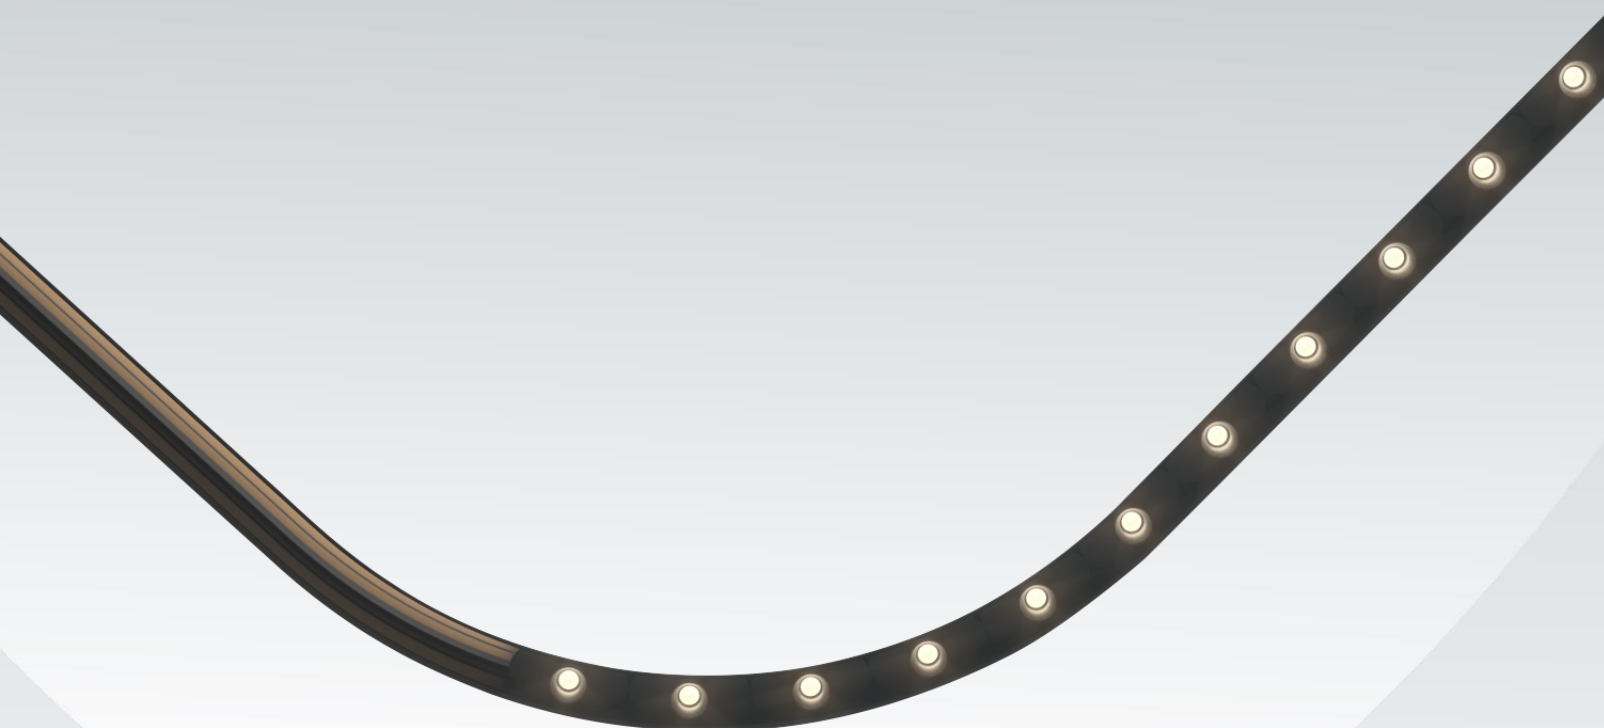

FEATURES


- ⊙ Low voltage 24V circuit design and external driver makes it very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Connected in chain, suitable for diverse lighting combination and different tracks design (straight or arc-type).
- ⊙ Each chain light can be used independently or connected in any length to satisfy different demands.
- ⊙ Anti-glare, lighting source invisible. LED lens makes the light even and soft (Optional lens)
- ⊙ Exquisite design, not only for illumination but also for decoration.

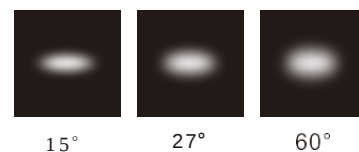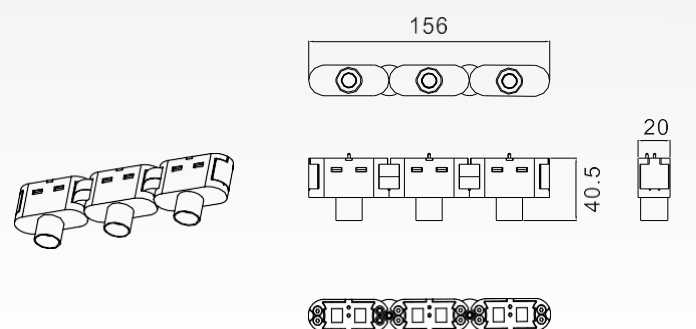

TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1310B01	1W*3	156*40.5*20mm	300lm	350mA*3	24V





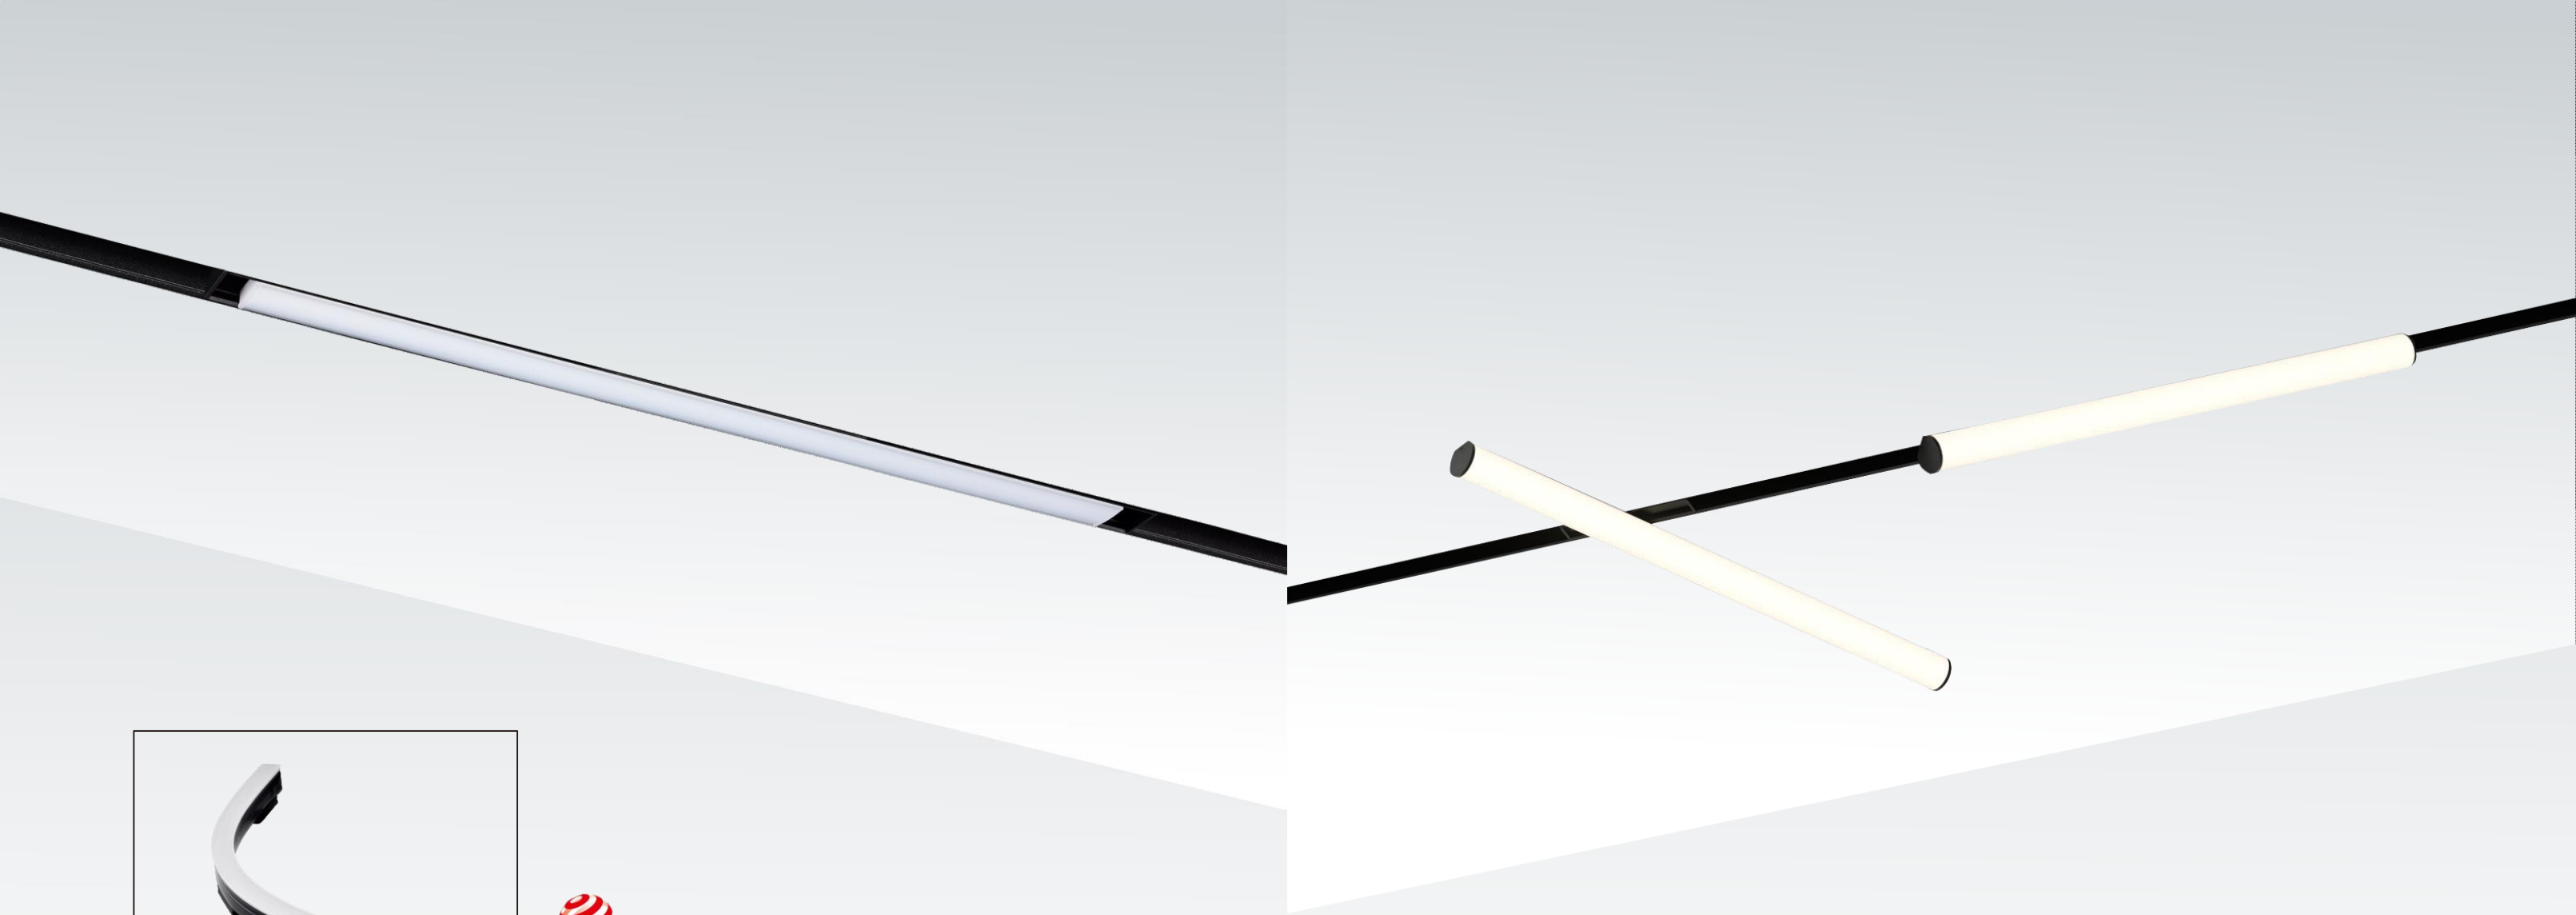

reddot winner 2021
lighting design

FEATURES

- ⦿ Low voltage 24V circuit design and external driver makes it be very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Silicone lamp body with high flexibility and elasticity. It fits well in different types of tracks (straight and arc-type).
- ⦿ Flood lighting design makes the light gentle and soft.
- ⦿ Concise linear shape and flexibility provides more inspirations and options for lighting design.

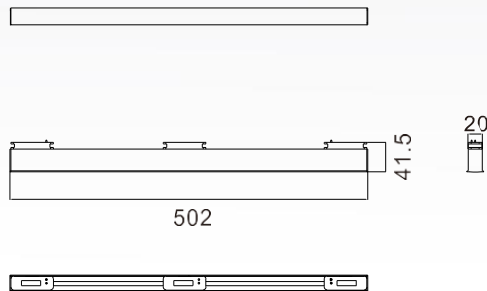



TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1306B01	7.2W*2	L500mm	130lm	300mA*2	24V


FEATURES

- ⦿ Low voltage 24V circuit design and external driver makes it very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Built-in type makes the light integrated with the track and ceiling perfectly.
- ⦿ Light can be very even and soft.
- ⦿ 0-355 degree rotatable humanized design, satisfies different demands.

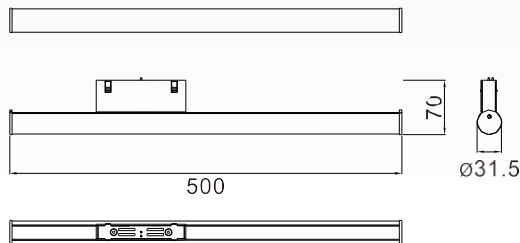


TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1322B01	14W	Ø31.5*L500mm	980lm	600mA	24V

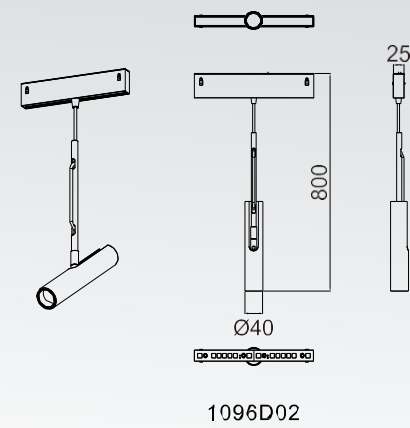

FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Adjustable and rotatable structure makes the light more flexible and humanized.
- ⊙ Extremely narrow beam angle LED lens makes the light pretty focused for accent lighting.
- ⊙ Exquisite design makes it not only a spot light but also a beautiful decoration.

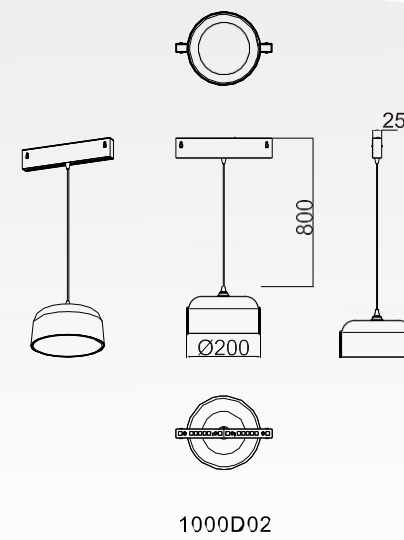




FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ LED diffuser ensure excellent and abundant distribution of light with maximum visual comfort.



TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1096D02	4W	Ø40*800mm	450 lm	600mA	24V
1000D02	28W	Ø200*800mm	1500 lm	1050mA	24V

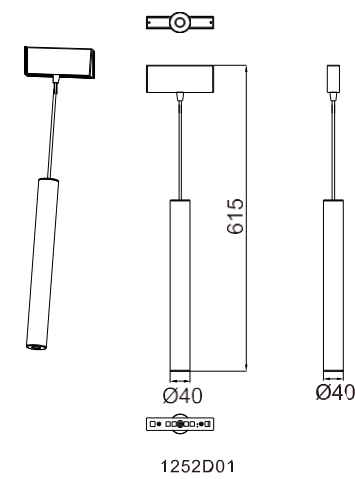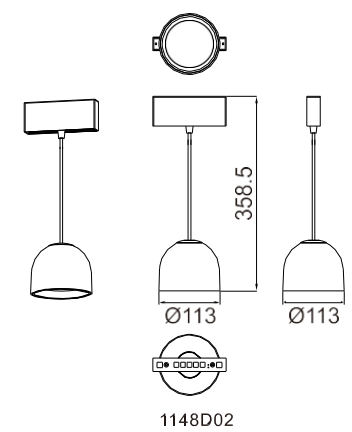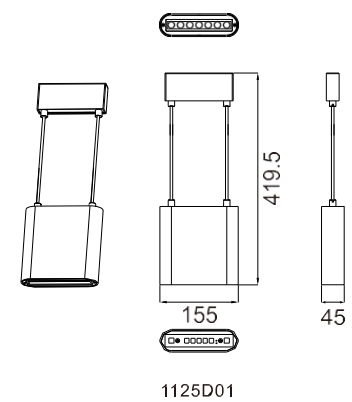

FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it be very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ LED lens makes the light be more focused (optional led lens), suitable for accent lighting.
- ⊙ Beautiful, decorative, contemporary oval shaped fixture suitable for decorative installations.
- ⊙ Decorative fixture with moderate illumination.

FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it be very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ The ThyssenKrupp LED diffuser with OSRAM LED chip ensure excellent distribution of light with maximum visual comfort.


FEATURES

- ⊙ Low voltage 24V circuit design and external driver makes it be very safe.
- ⊙ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⊙ Super slim shape makes it not only a light but also decoration.




TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1125D01	9W	155*419.5*45mm	600 lm	350mA	24V
1148D02	18W	Ø113*358.5mm	1200 lm	900mA	24V
1252D01	4W	Ø40*615mm	450 lm	600mA	24V

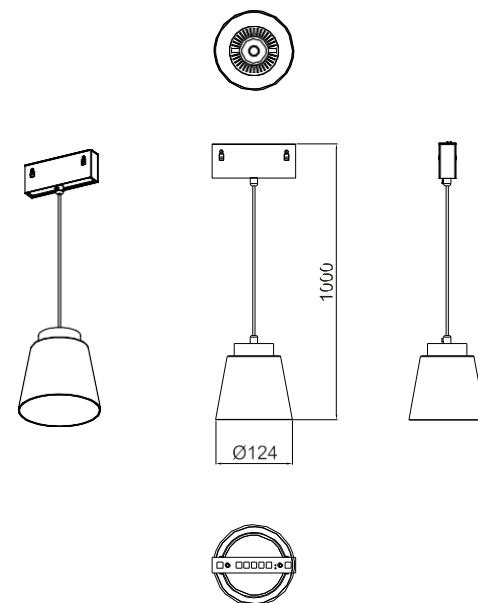

FEATURES

- ⦿ Low voltage 24V circuit design and external driver makes it very safe.
- ⦿ Built with magnetic system, the light can be inserted into the track easily and quickly.
- ⦿ Pendant type, fitting well in indoor spaces such as dinning room.
- ⦿ Transparent lampshade with special optic lens creates mysterious and romantic vibe.



TECHNICAL PARAMETERS

Model	Wattage	Dimensions	Lumens(lm)	Current	Output V
1323D02	10W	Ø124*1000mm	500 lm	250mA	24V

